



Cushion
MATS

**PLAIN & DESIGN
CARPETS**



**WOODEN / VINYL
FLOORING**

**VENETIAN & VERTICAL
BLIND**



**WALL PAPER
&
FILM**



A. K. INTERNATIONAL

12/1, S. A. ALI AVE., KOL. - 17, PHONE : 2281-7518, 2280-9034/ 9830117275





MELODY 2 - 2388 CALICO BLUE

MELODY 2 Specifications

Construction	5/64th inch Level Loop Pile
Fibre	100% BCF Solution Dyed Synthetic
Pile Weight	ca. 750g/m ² (22 oz/y ²)
Total Weight	ca. 3210g/m ² (95 oz/y ²)
Pile height	ca. 3mm (+/- 0.5mm)
Stitch Rate	48 per 10cm
Backing	ECO Back - "PVC Free"
Size per Tile	50cm x 50cm
Tiles per Box	20 pcs (5m ²)

Warranties

10-year Carpet Wear Warranty
Lifetime Antishock Carpet Warranty

Ideal for Medium Contract Use.

Performance (as tested by ITTS Inc. USA)

Stain Resistance	10 (AATCC-175-2003)
Static Control	Less < 4 KV (AATCC 134-1996)
Tuft Bind	8.8 lbs (ASTM-D-1335)
Dimensional Stability	< 0.1% change (AACHEN)
Flammability	
Radiant Panel	>= 0.45 watts/cm ² (ASTM-E-648-06)
Pill Test	8 (ASTM-D-2859-06)
Smoke Density	Max 450 (ASTM-E-662-06)
Colourfastness	
to light	5 (AATCC-16E)
to wet & dry crocking	5 (AATCC-16S)
to ozone	5 (AATCC-129)

Environment

The design and production of Melody 2 Tile conforms to the ISO 14001:2004 Environmental Management System and complies with environmental regulations.

Melody 2 Tile is an environmentally friendly "green" carpet.



Recommended Laying Method



Microstitch



Quarter Turn



2372 SANDBAR



2376 TIMBERLANE




2377 GREY TWEED



2378 BLACK FOREST



2388 CALICO BLUE

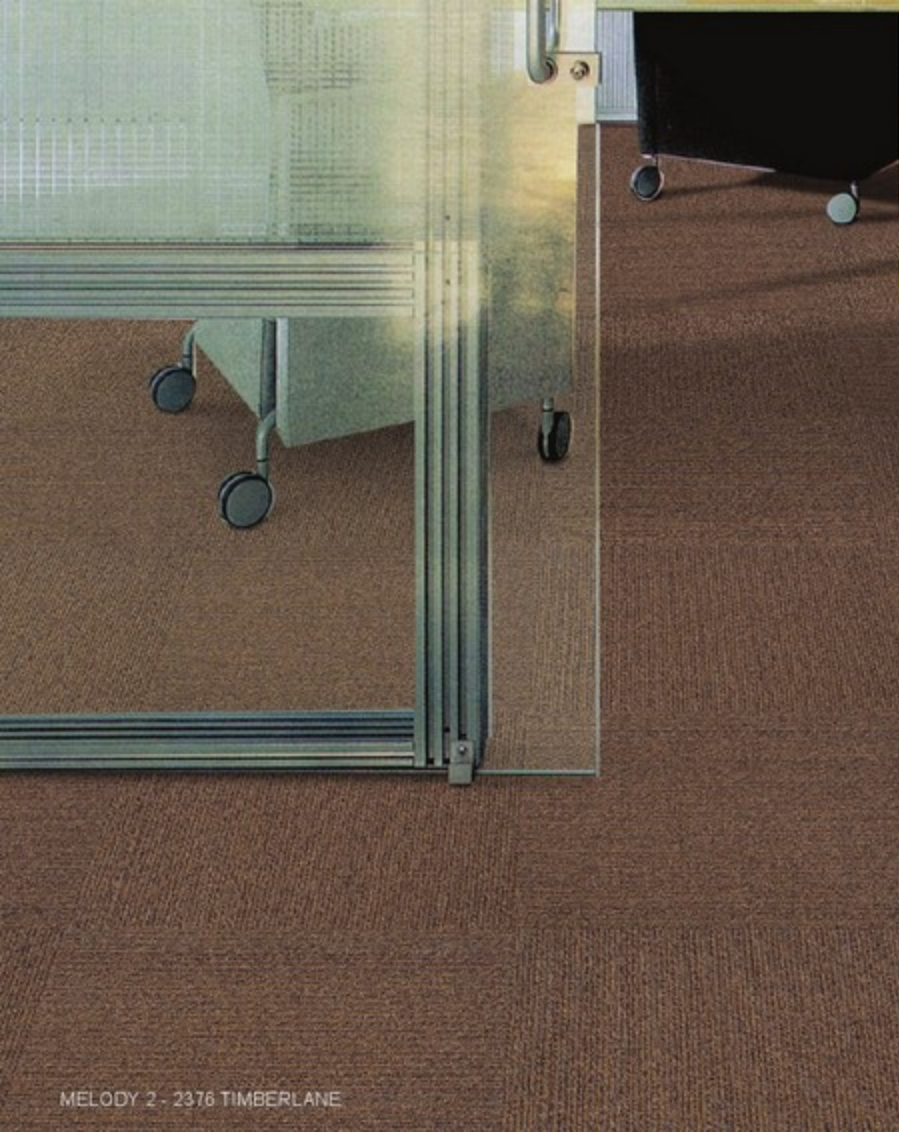

MELODY 2 - 2376 TIMBERLANE



MELODY 2 - 2377 GREY TWEED