



Cushion
MATS

**PLAIN & DESIGN
CARPETS**



**VENETIAN & VERTICAL
BLIND**




**WALL PAPER
&
FILM**

A. K. INTERNATIONAL

12/1, S. A. ALI AVE., KOL. - 17, PHONE : 2281-7518, 2280-9034/ 9830117275

Elegance & Comfort in Modern Living

4505 EMPIRE BEIGE



Brick Method




Quarter Turn Method



Ashlar Method

4503 FORBES GREY



Brick Method



Quarter Turn Method



Ashlar Method

4504 CYPRESS BLUE




Brick Method



Quarter Turn Method



Ashlar Method

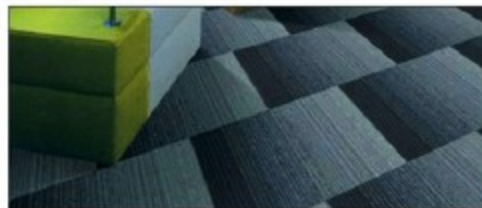

MELODY 4 Specifications

Construction	1/10th Inch Level Loop Pile
Fibre	100% BCF Solution Dyed Synthetic
Pile Weight	ca. 750g/m ² (22 oz/y ²)
Total Weight	ca. 3210g/m ² (95 oz/y ²)
Pile Height	ca. 3mm
Total Height	ca. 6mm
Stitch Rate	42 per 10cm
Backing	ECO Back - "PVC Free"
Size per Tile	50cm x 50cm
Tiles per Box	20 pcs (5m ²)

Warranties

10-year Limited Carpet Wear Warranty
Lifetime Antishock Carpet Warranty

Ideal for Medium Contract Use

Performance (as tested by ITTS Inc. USA)

Stain Resistance	10 (AATCC-175-2003)
Static Control	Less < 4 KV (AATCC 134-1996)
Tuft Bind	8.8 lbs (ASTM-D-1335)
Dimensional Stability	< 0.1% change (AACHEN)
Flammability	
Radiant Panel	>= 0.45 watts/cm ² (ASTM-E-648-06)
Pill Test	8 (ASTM-D-2859-06)
Smoke Density	Max 450 (ASTM-E-662-06)
Colourfastness	
to light	5 (AATCC-16E)
to wet & dry crocking	5 (AATCC-16S)
to ozone	5 (AATCC-129)

Environment

The design and production of Melody 4 Tile conforms to the ISO 14001:2004 Environmental Management System and complies with environmental regulations.

Melody 4 Tile is an environmentally friendly "green" carpet.

Recommended Laying Method




Quarter Turn




Ashlar




Brick

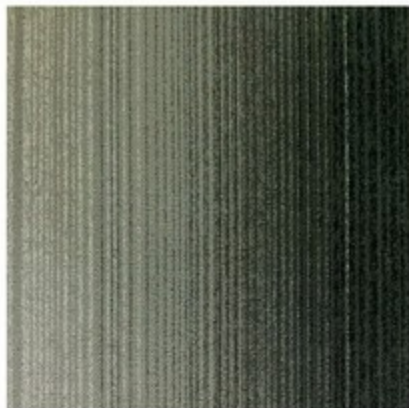

4503 FORBES GREY

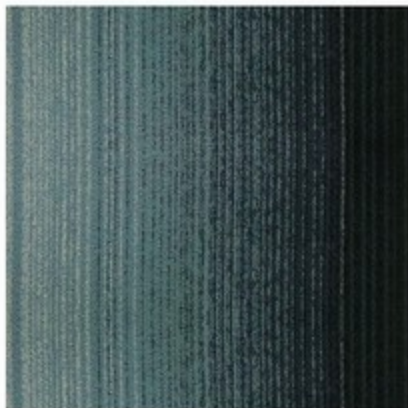

4504 CYPRESS BLUE

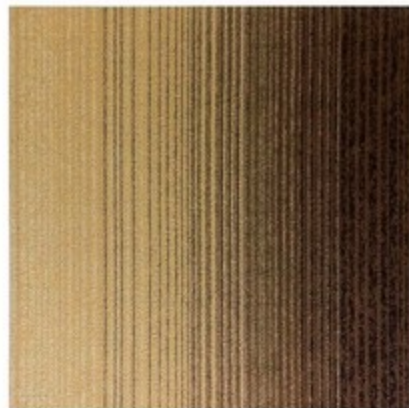

4505 EMPIRE BEIGE



MELODY 4