



Cushion
MATS

**PLAIN & DESIGN
CARPETS**



**WOODEN / VINYL
FLOORING**

**VENETIAN & VERTICAL
BLIND**



**WALL PAPER
&
FILM**



A. K. INTERNATIONAL

12/1, S. A. ALI AVE., KOL. - 17, PHONE : 2281-7518, 2280-9034/ 9830117275



Elegance & Comfort in Modern Living



TRENTO - 615 SHERWOOD GREEN



TRENTO



TRENTO Specifications

Construction	1/10" Tufted Loop Pile
Fibre	100% Nylon Solution Dyed + Space Dyed
Total Weight	ca. 4500g/m ² (133 oz/y ²)
Pile height	ca. 2.6mm
Total height	ca. 6.2mm
Backing	T-flex Supra®
Size per Tile	50x50cm
Tiles per Box	20 pc (5 m ²)

Warranties

10-year Limited Carpet Wear Warranty


Ideal for Heavy Commercial Use.

Performance

Flammability	M3 (INP 92-506), B1 (DIN 4102), A3 (NBN 521-203)
Static Generation	Antistatic <2kV (EN1815)
Colourfastness	
to light	> 5-6 (ISO 105-B02)
to wet cleaning	> 4 (ISO 105-E01)
to rubbing	> 4 (ISO 105-E01)
Thermal Resistance	0.055 qm K/W (ISO 8302)
Impact Noise Rating	26 dB (ISO 140-8)
Transversal Resistance	< 10 ⁸ Ohm
Dimensional Stability	Max. - 0.2% (EN 986)

T-flex Supra® comprises of 4 layers: non-woven polyester, T-flex compound, woven glass fiber & T-flex compound. This is superior to PVC, ordinary Bitumen or EVA foam backings. It is more flexible and less sensitive to heavy wear & temperature fluctuations.

The backing is first extruded separately and online, then the preheated and relaxed carpet is laminated onto the backing. Equal tension on backing and carpet when put together, results in higher dimensional stability.

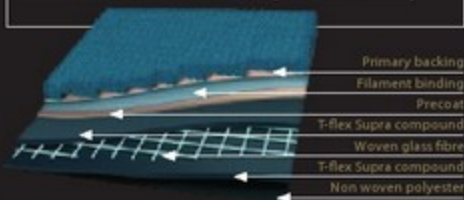

Primary backing

Filament binding

Precoat

T-flex Supra compound

Woven glass fibre

T-flex Supra compound

Non woven polyester

Recommended Laying Method



Quarter Turn

Manufactured in Belgium, E.E.C.



155 STONE



517 STEEL BLUE



550 COBALT



566 SIGNAL BLUE



615 SHERWOOD GREEN



908 ZINC

TRENTO PROJECTS



Trento - 550 Cobalt (Orchard Office Singapore)